


SA

AUTOMATIC GREASERS


AT LAST YOU CAN SOLVE A LOT OF MAINTENANCE PROBLEMS
WITH SA AUTOMATIC GREASERS!
Easy, straightforward installation,
Constant and adjustable grease feed,
Small size
Made out entirely of light alloy,
Possibility of high temperature operation,
No more stoppages due to lack of lubrication
Fewer maintenance operations
Considerable cost saving.

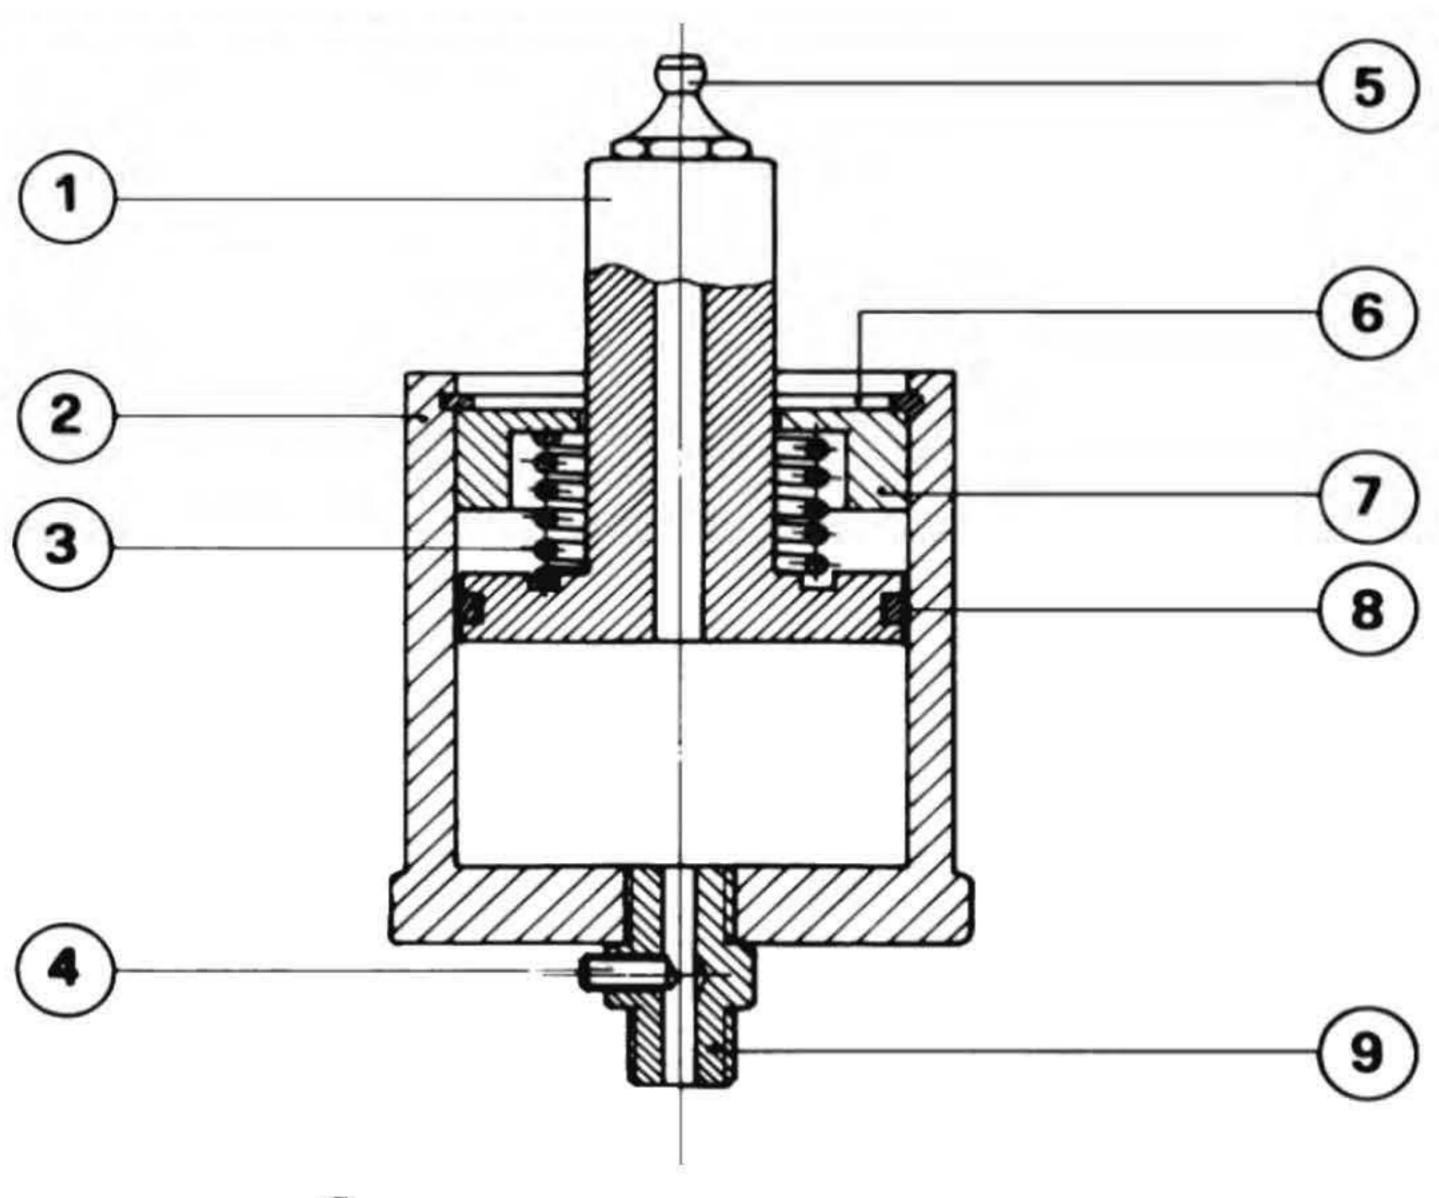

DESCRIPTION 1 Piston 2 External Body 3 Spring 4 Grease dispenser 5 Filling Head 6 Snap Ring 7 Spacer 8 O-Ring 9 Linkage




N.B.
The quantity of the grease that comes out depends on:
a) the type of device to lubricate
b) the operating temperature
c) the number of turn
d) the viscosity of the grease used
e) the frequency of intervention
f) the load applied

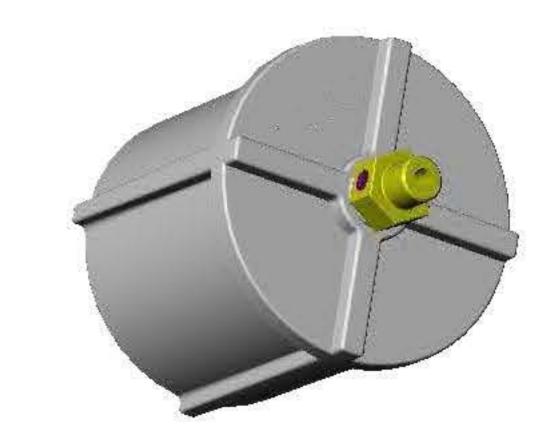




SA

AUTOMATIC GREASERS

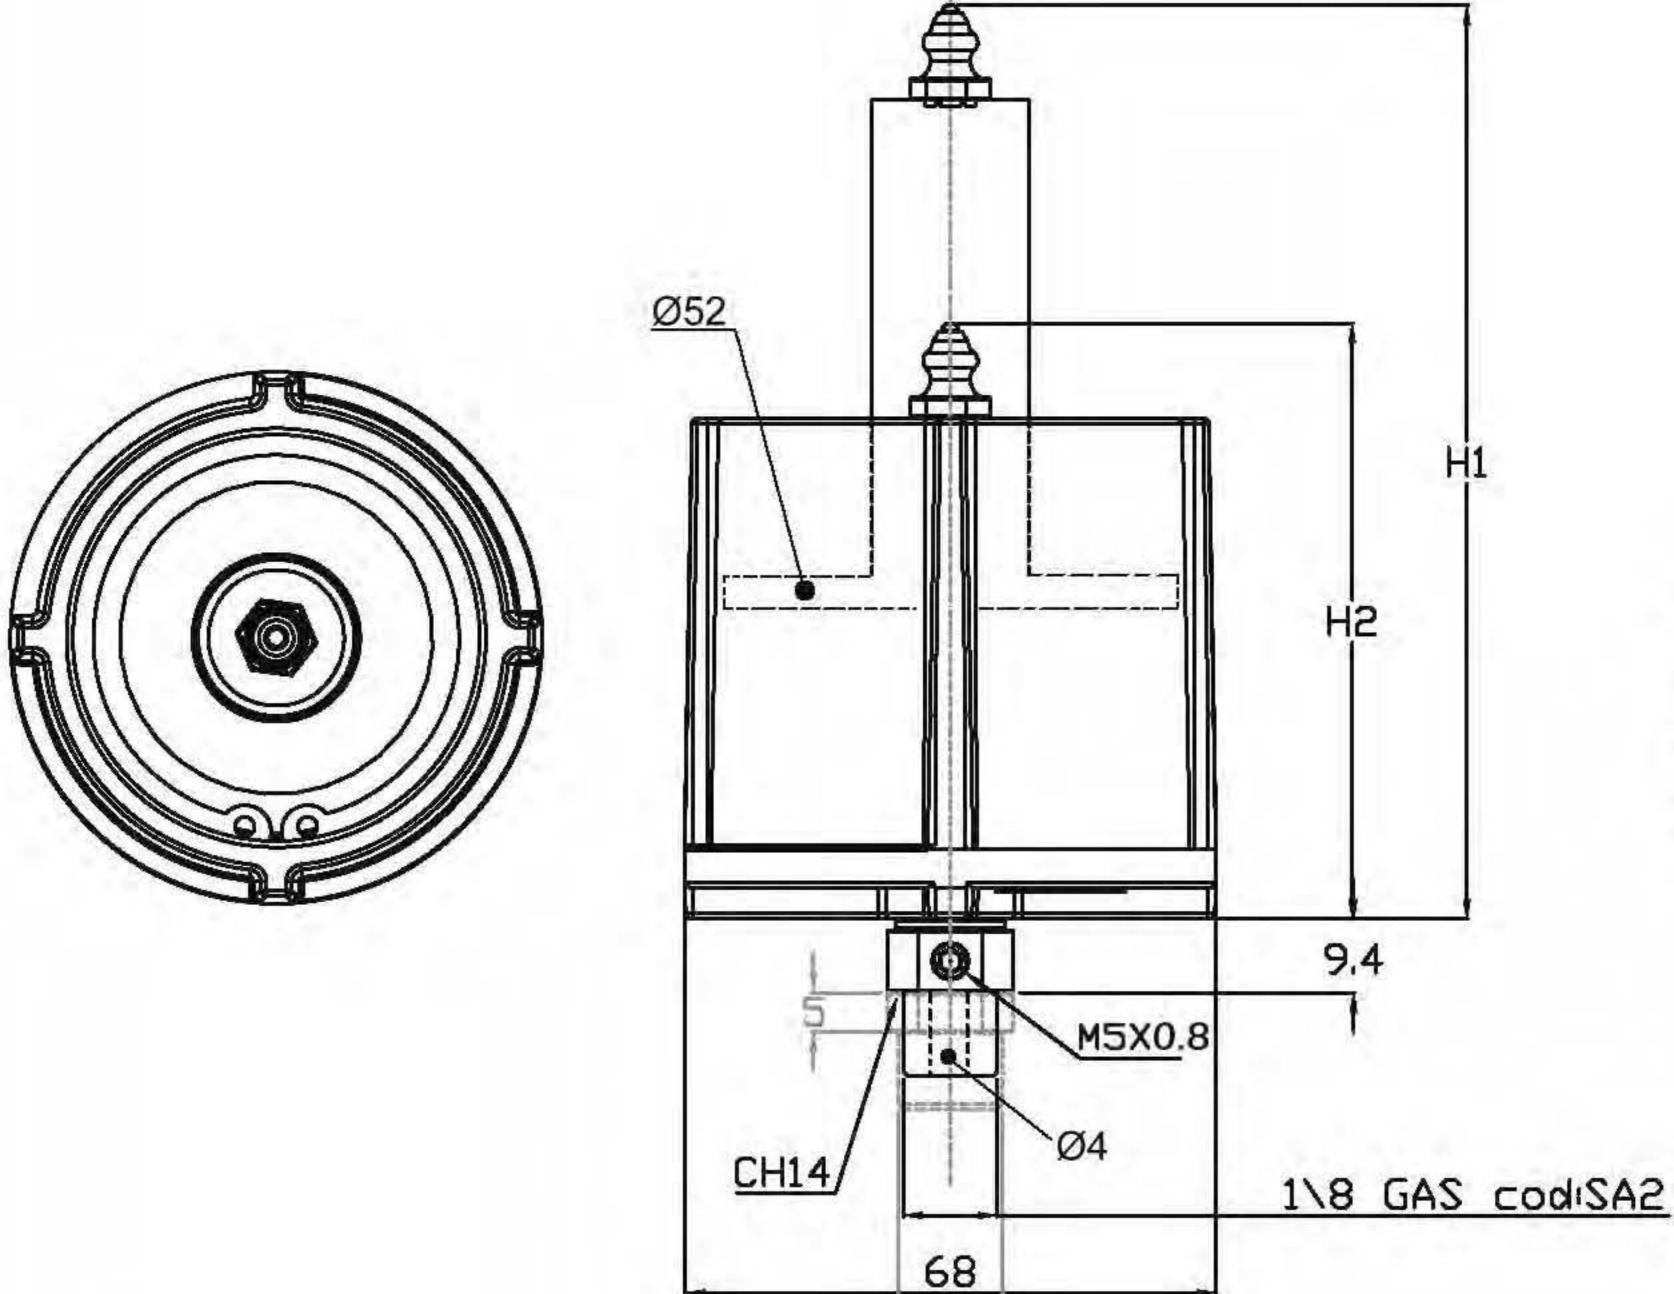

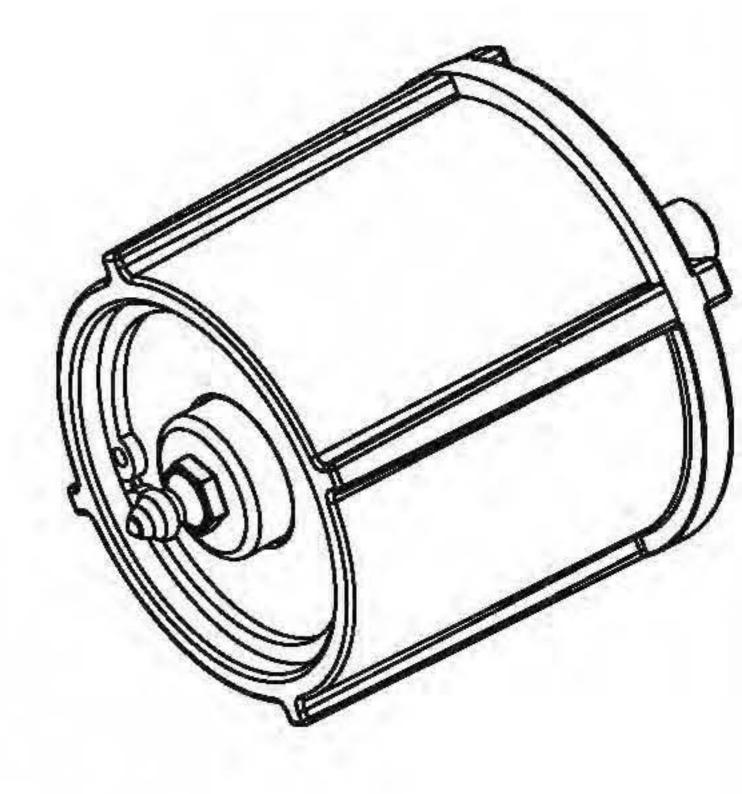



1\4GAS codiSA214

COD	CC	FULL H1	EMPTY H2	Kg
SA214	CC 65	106	75	0,314



SETTING OF THE DISPENSER

If you act on the screw with the embedded hexagon that is set up on the threaded nipple 1/8"GAS you can determine the quantity of grease that comes out of the greaser:

If you turn the screw in you cut down the grease that comes out

If you unscrew you increase the quantity of grease that comes out.