

ŠPIRÁLOVÉ SPOJKY

WKAK




Bezvôľové špirálové spojky so zverným nábojom

Materiál: hliník, pochrómovaný

Vyrobený z jedného kusa materiálu

skrutka s valcovou hlavou DIN912

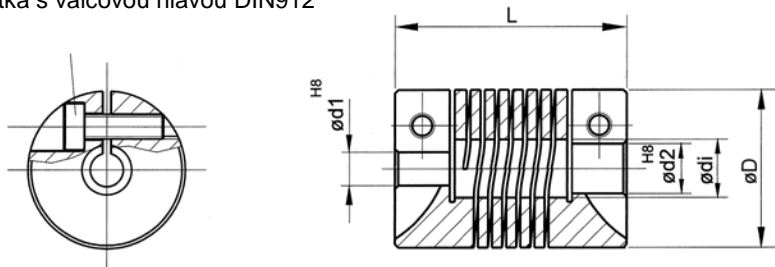


Typ	Vrtanie d ₁ /d ₂		Priemer D	Dĺžka L	Nastav. skrutka
	min.	max.			
WKAK 1421 02/02	2	2	14	21	M2x6
WKAK 1421 02/03	2	3	14	21	M2x6
WKAK 1421 03/03	3	3	14	21	M2x6
WKAK 1421 03/04	3	4	14	21	M2x6
WKAK 1421 04/04	4	4	14	21	M2x6
WKAK 1625 03/03	3	3	16	25	M2x6
WKAK 1625 03/05	3	5	16	25	M2x6
WKAK 1625 04/04	4	4	16	25	M2x6
WKAK 1625 05/05	5	5	16	25	M2x6
WKAK 1928 04/04	4	4	19	28	M3x10
WKAK 1928 04/06	4	6	19	28	M3x10
WKAK 1928 05/05	5	5	19	28	M3x10
WKAK 1928 05/06	5	6	19	28	M3x10
WKAK 1928 06/06	6	6	19	28	M3x10

Typ	Vrtanie d ₁ /d ₂		Priemer D	Dĺžka L	Nastav. skrutka
	min.	max.			
WKAK 2532 06/06	6	6	25	32	M3x10
WKAK 2532 06/08	6	8	25	32	M3x10
WKAK 2532 06/10	6	10	25	32	M3x10
WKAK 2532 08/08	8	8	25	32	M3x10
WKAK 2532 08/10	8	10	25	32	M3x10
WKAK 2532 10/10	10	10	25	32	M3x10
WKAK 2532 10/12	10	12	25	32	M3x10
WKAK 3038 10/10	10	10	30	38	M4x12
WKAK 3038 12/12	12	12	30	38	M4x12
WKAK 3038 14/14	14	14	30	38	M4x12

Typ	WKAK 1421	WKAK 1625	WKAK 1928	WKAK 2532	WKAK 3038
Max. otáčky [min ⁻¹]	6.000	6.000	6.000	6.000	6.000
Max. krútiaci moment [Ncm]	50	60	80	120	150
Max. vyosenie hriadeľov	-	-	-	-	-
radiálne [mm]	±0,2	±0,2	±0,25	±0,35	±0,35
axiálne [mm]	±0,25	±0,3	±0,4	±0,5	±0,5
uhol [stupeň]	±3	±3,5	±4	±4	±0,4
Tuhosť pružín v krute [Nm/rad]	4,5	5,5	8	16	19
Radiálna tuhosť pružín [N/[mm]]	22	30	36	45	60
Moment zotrvačnosti [gcm ²]	1,9	3,8	8,7	29	76
Max. moment skrutiek [Ncm]	50	50	80	100	100
Hmotnosť [g]	6,5	10	16	34	58

ŠPIRÁLOVÉ SPOJKY

WKAS




Bezvôľové špirálové spojky s nastavovacími skrutkami

Materiál: hliník, pochromovaný

Vyrobený z jedného kusa

skrutka s valcovou hlavou DIN912

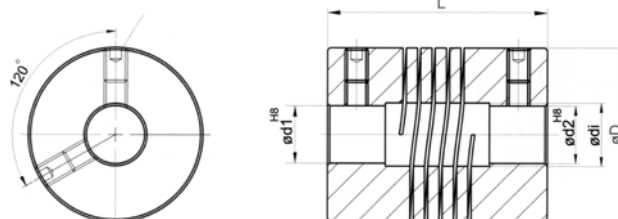

Typ	Vrtanie d_1/d_2		Priemer D	Dĺžka L	Nastavovacia skrutka
	min.	max.			
WKAS 6508 01/01	1	1	6,5	8	M1,6x2
WKAS 6508 01/02	1	2	6,5	8	M1,6x2
WKAS 6508 02/02	2	2	6,5	8	M1,6x2
WKAS 1015 02/02	2	2	10	15	M2x3
WKAS 1015 02/03	2	3	10	15	M2x3
WKAS 1015 02/04	2	4	10	15	M2x3
WKAS 1015 02/05	2	5	10	15	M2x3
WKAS 1015 03/03	3	3	10	15	M2x3
WKAS 1015 03/05	3	5	10	15	M2x3
WKAS 1218 02/04	2	4	12	18	M2,5x3
WKAS 1218 03/03	3	3	12	18	M2,5x3
WKAS 1218 03/04	3	4	12	18	M2,5x3
WKAS 1218 04/04	4	4	12	18	M2,5x3
WKAS 1622 03/03	3	3	16	22	M3x5
WKAS 1622 04/04	4	4	16	22	M3x5
WKAS 1622 04/05	4	5	16	22	M3x5
WKAS 1622 05/05	5	5	16	22	M3x5
WKAS 1622 06/06	6	6	16	22	M3x5
WKAS 1922 04/06	4	6	19	22	M3x5
WKAS 1922 05/05	5	5	19	22	M3x5
WKAS 1922 06/06	6	6	19	22	M3x5

Typ	Vrtanie d_1/d_2		Priemer D	Dĺžka L	Nastavovacia skrutka
	min.	max.			
WKAS 2524 06/06	6	6	25	24	M4x6
WKAS 2524 06/08	6	8	25	24	M4x6
WKAS 2524 06/10	6	10	25	24	M4x6
WKAS 2524 08/08	8	8	25	24	M4x6
WKAS 2524 10/10	10	10	25	24	M4x6
WKAS 2524 12/12	12	12	25	24	M4x6
WKAS 2532 06/06	6	6	25	32	M4x6
WKAS 2532 06/08	6	8	25	32	M4x6
WKAS 2532 06/10	6	10	25	32	M4x6
WKAS 2532 08/08	8	8	25	32	M4x6
WKAS 2532 08/10	8	10	25	32	M4x6
WKAS 2532 10/10	10	10	25	32	M4x6
WKAS 2532 10/12	10	12	25	32	M4x6
WKAS 3038 10/10	10	10	30	38	M4x6
WKAS 3038 12/12	12	12	30	38	M4x6
WKAS 3038 14/14	14	14	30	38	M4x6

Typ	WKAS 6508	WKAS 1015	WKAS 1218	WKAS 1622	WKAS 1922	WKAS 2524	WKAS 2532	WKAS 3038
Max. otáčky [min ⁻¹]	8.000	8.000	8.000	8.000	8.000	8.000	8.000	8.000
Max. krútiaci moment [Ncm]	2	15	25	40	60	100	100	150
Max. vyosenie hriadeľov								
radiálne [mm]	±0,10	±0,15	±0,15	±0,2	±0,25	±0,3	±0,3	±0,3
axiálne [mm]	±0,15	±0,2	±0,25	±0,3	±0,4	±0,5	±0,5	±0,5
uhol [stupeň]	±2	±2	±2,5	±3	±3,5	±4	±4	±4
Tuhosť pružín v krute [Nm/rad]	0,55	2,2	2,8	5	9	20	18	21
Radiálna tuhosť pružín [N/mm]	24	22	28	34	40	60	50	60
Moment zotrvačnosti [gcm ²]	0,02	0,34	0,83	3,2	6,7	22,2	30	76
Max. moment skrutiek [Ncm]	8	15	35	50	50	120	120	120
Hmotnosť [g]	0,05	2,4	4	9,5	13	26	35	60