


art.DXA

FIXED SUPPORTS mod.10/60 in nitrided steel with axial/radial bearings and accessories.



Assembled DXA support.

DXA Support - exploded diagram.


Standard fitting on the machine with and without Supports Base.

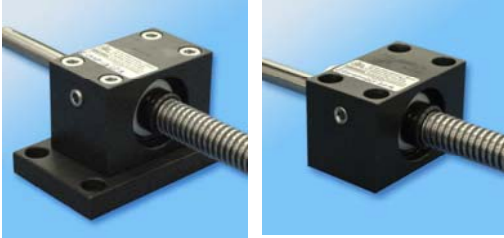

Fitting below machine with and without Supports Base.

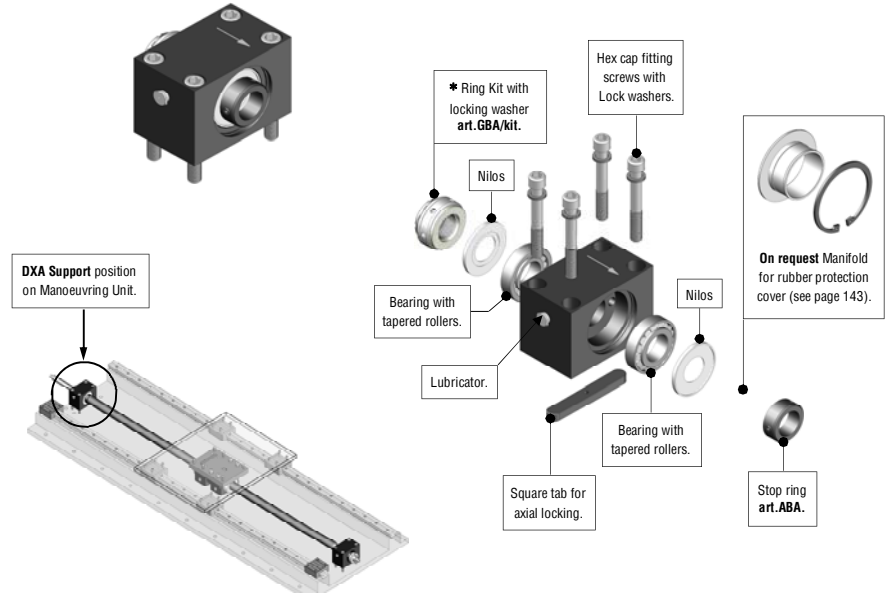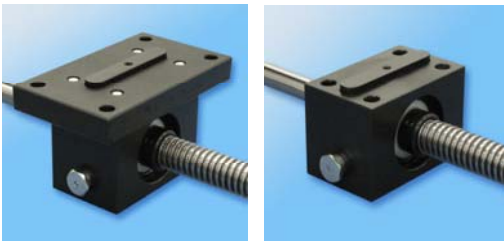

- Support DXA ready for fitting to the machine. Available if necessary, as shown in the two photos, with Supports Base art.BD LXR (please see page 144).
- Accessory support bracket art.SMA (please see pages 146-147)
- * Alternatively, for particular technical requirements for manual/horizontal movements, the DXA support is available with self-locking ring GHA (please see page 51).
- Complete diagrams showing how to fit to the machine are on pages 158 - 161.

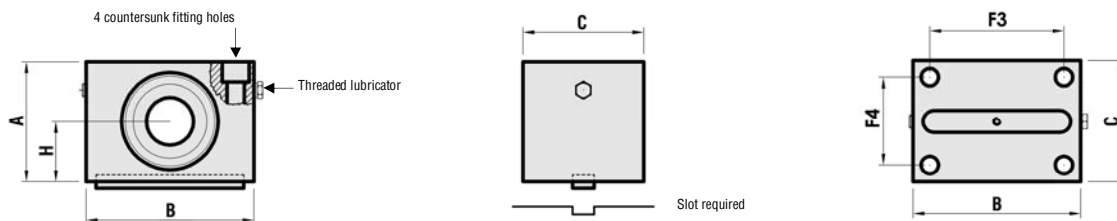

- C = Nett size of the support excluding accessories and eventual Manifold for rubber protection cover.
- Approximate weight with accessories and fitting bolts, excluding Supports Base BD LXR.

| MODELS | CODE | ARTICLE | A | B | C | H | Ø Internal of bearings | F3 | F4 | Hex. Cap screws for fitting | Slot required for fitting | Threaded Lubricator | WEIGHT Kg |
|---------------|--------------|--------------|-----|-----|-----|------|------------------------|-----|----|-----------------------------|---------------------------|---------------------|-----------|
| mod. 10 | 301SF010 | DXA 10 | 34 | 55 | 30 | 17,5 | 10 (8) | 40 | 17 | M6x40 | Ø5x42x3 | M6x1 | 0,400 |
| mod. 12 | 301SF012 | DXA 12 | 39 | 60 | 30 | 20 | 10 | 45 | 17 | M6x45 | Ø6x47x3 | M6x1 | 0,520 |
| mod. 14 | 301SF014 | DXA 14 | 44 | 65 | 35 | 22,5 | 12 | 50 | 20 | M8x50 | Ø8x52x3,5 | M6x1 | 0,730 |
| mod. 16 | 301SF016 | DXA 16 | 49 | 70 | 40 | 25 | 15 | 54 | 24 | M8x55 | Ø10x62x4 | 1/8G | 0,980 |
| mod. 18 | 301SF018 | DXA 18 | 49 | 75 | 45 | 25 | 15 | 55 | 27 | M8x55 | Ø10x62x4 | 1/8G | 1,220 |
| mod. 20 22 | 301SF02022 | DXA 20 22 | 54 | 80 | 50 | 27,5 | 15 | 60 | 32 | M8x60 | Ø12x72x4 | 1/8G | 1,610 |
| mod. 24 25 26 | 301SF0242526 | DXA 24 25 26 | 64 | 95 | 55 | 32,5 | 17 | 75 | 35 | M10x75 | Ø14x82x4,5 | 1/8G | 2,510 |
| mod. 28 30 32 | 301SF0283032 | DXA 28 30 32 | 69 | 100 | 60 | 35 | 20 | 80 | 40 | M10x80 | Ø14x92x4,5 | 1/8G | 3,020 |
| mod. 35 36 | 301SF03536 | DXA 35 36 | 79 | 110 | 70 | 40 | 25 | 90 | 50 | M10x90 | Ø14x102x4,5 | 1/8G | 4,480 |
| mod. 40 | 301SF040 | DXA 40 | 84 | 120 | 75 | 42,5 | 30 | 95 | 50 | M12x100 | Ø16x112x5 | 1/8G | 5,230 |
| mod. 45 46 | 301SF04546 | DXA 45 46 | 89 | 125 | 90 | 45 | 35 | 100 | 65 | M12x100 | Ø16x112x5 | 1/8G | 6,640 |
| mod. 50 | 301SF050 | DXA 50 | 99 | 130 | 90 | 50 | 40 | 105 | 65 | M12x110 | Ø16x122x5 | 1/8G | 7,650 |
| mod. 55 | 301SF055 | DXA 55 | 109 | 150 | 109 | 55 | 40 | 122 | 80 | M14x120 | Ø16x142x5 | 1/8G | 12,100 |
| mod. 60 | 301SF060 | DXA 60 | 109 | 150 | 109 | 55 | 45 | 122 | 80 | M14x120 | Ø16x142x5 | 1/8G | 12,060 |

- The supports above are shown assembled in the Excellent steel Groups (see preceding pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 127
- To comply with safety regulations it is obligatory to use the locking tabs, the fitting hardware supplied, and ensuring that the arrows engraved in the supports are all facing in the same direction, which for vertical/oblique movements must be facing downwards.