


art.DXB

FIXED SUPPORTS mod.10/60 in nitrided steel with axial/radial bearings and accessories.



Assembled DXB support

DXB Support - exploded diagram

Standard fitting on the machine with and without Supports Base

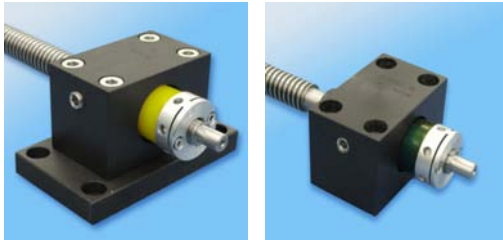


Fitting below machine with and without Supports Base

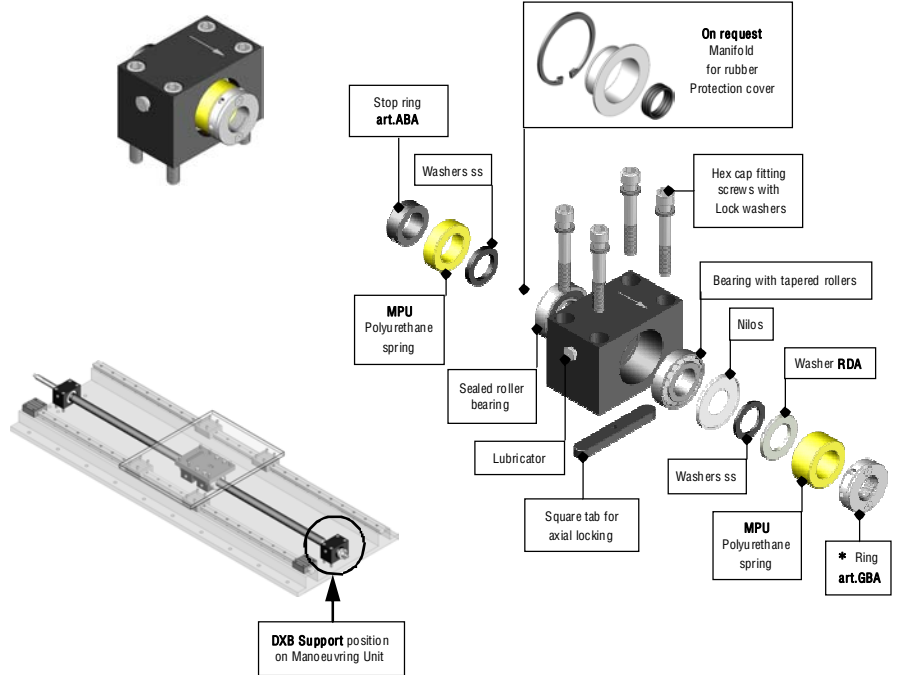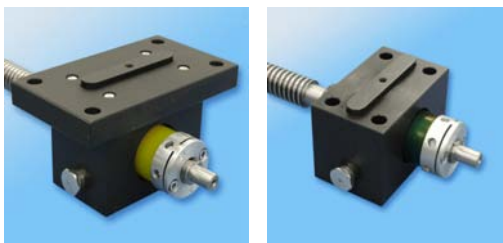

> **Support DXB** ready for fitting to the machine. Available if necessary, as shown in the two photos, with **Supports Base art.BD LXR** (please see page 144).

* Alternatively, for particular technical requirements for manual/horizontal movements, the DXB support is available with **self-locking ring GHA** (please see page 51).

> Complete diagrams showing how to fit to the machine are on pages 158 - 161.

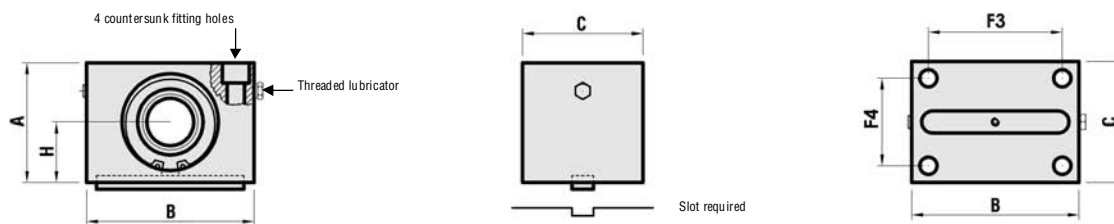

> **C = Net size of the support excluding accessories and eventual Manifold for rubber protection cover.**

> **Approximate weight with accessories and fitting bolts, excluding Supports Base BD LXR.**

MODELS	CODE	ARTICLE	A	B	C	H	Ø Internal of bearings	F3	F4	Hex. Cap screws for fitting	Slot required for fitting	Threaded Lubricator	WEIGHT Kg
mod. 10	301SF110	DXB 10	34	55	30	17,5	10 (6)	40	17	M6x40	Ø5x42x3	M6x1	0,440
mod. 12	301SF112	DXB 12	39	60	30	20	10 (8)	45	17	M6x45	Ø6x47x3	M6x1	0,540
mod. 14	301SF114	DXB 14	44	65	35	22,5	12 (8)	50	20	M8x50	Ø8x52x3,5	M6x1	0,750
mod. 16	301SF116	DXB 16	49	70	40	25	10	54	24	M8x55	Ø10x62x4	1/8G	1,040
mod. 18	301SF118	DXB 18	49	75	45	25	12	55	27	M8x55	Ø10x62x4	1/8G	1,260
mod. 20 22	301SF12022	DXB 20 22	54	80	50	27,5	15	60	32	M8x60	Ø12x72x4	1/8G	1,580
mod. 24 25 26	301SF1242526	DXB 24 25 26	64	95	55	32,5	17	75	35	M10x75	Ø14x82x4,5	1/8G	2,450
mod. 28 30 32	301SF1283032	DXB 28 30 32	69	100	60	35	20	80	40	M10x80	Ø14x92x4,5	1/8G	2,950
mod. 35 36	301SF13536	DXB 35 36	79	110	70	40	25	90	50	M10x90	Ø14x102x4,5	1/8G	4,350
mod. 40	301SF140	DXB 40	84	120	75	42,5	30	95	50	M12x100	Ø16x112x5	1/8G	5,030
mod. 45 46	301SF14546	DXB 45 46	89	125	90	45	35	100	65	M12x100	Ø16x112x5	1/8G	6,300
mod. 50	301SF150	DXB 50	99	130	90	50	40	105	65	M12x110	Ø16x122x5	1/8G	7,220
mod. 55	301SF155	DXB 55	109	150	109	55	40	122	80	M14x120	Ø16x142x5	1/8G	11,630
mod. 60	301SF160	DXB 60	109	150	109	55	45	122	80	M14x120	Ø16x142x5	1/8G	11,480

> The supports above are shown assembled in the **Excellent steel** Groups (see preceding pages) for which it is possible to calculate the total weight by adding them to the weight of the TR screw using the table on page 127.

> To comply with safety regulations it is obligatory to use the locking tabs, the fitting hardware supplied, and ensuring that the arrows engraved in the supports are all facing in the same direction, which for vertical/oblique movements must be facing downwards.

Photos, diagrams and technical data are the exclusive property of Bimeccanica srl. All rights reserved.